


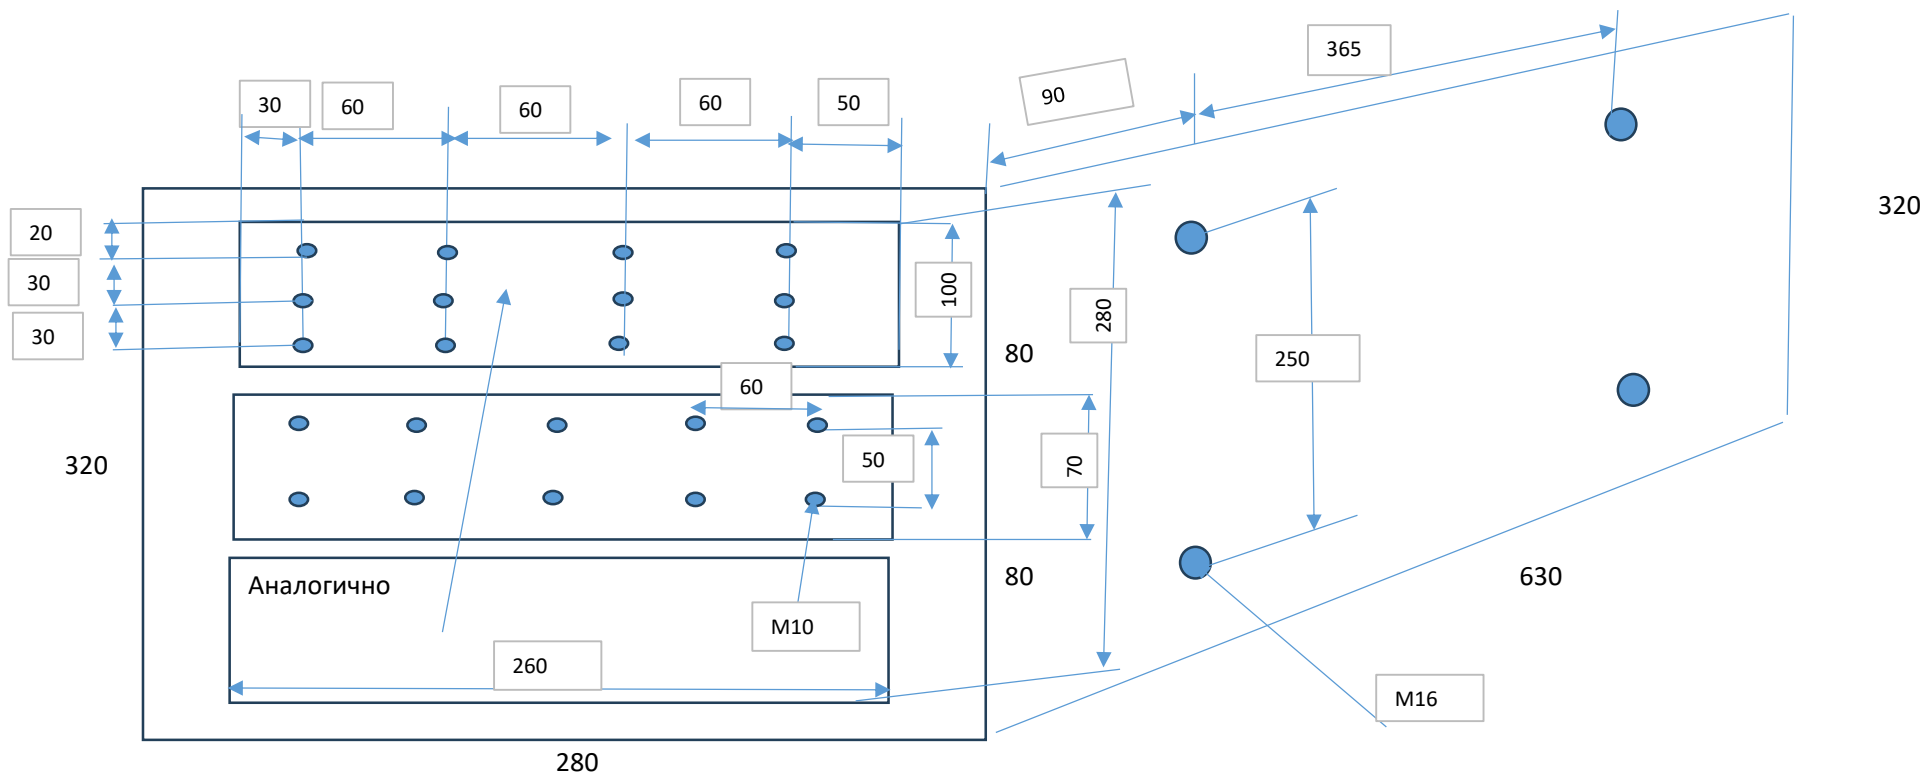

MT300.0.G-B			
Output power at 50% duty factor	P ₅₀	(kVA)	300
Frequency	f	Hz	50
Rated supply voltage	U _{1N}	V	400
Output current at 50% duty factor	I _{2/50}	(kA)	41,6
Rated output no-load voltage	U ₂₀	V	7,2
Short-circuit voltage (20°C)	U _{cc}	%	5,00
Power factor	cos φ _{cc}		0,9
Required total rate of cooling liquid flow	Q	(l/min)	2x5
Insulation Class			F